


**TIANJIN
HARDWARE CO.,LTD**

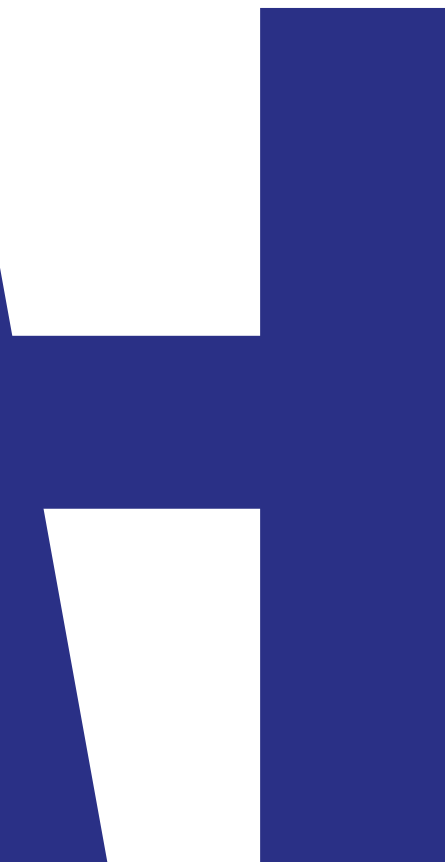

Website: www.allhardwares.com

Email: info@allhardwares.com

Tel: 86-18949109860



(wechat)




(whats app)

WIRE ROPE



Wire rope is a spiral steel wire bundle that twists together steel wires with mechanical properties and geometric dimensions that meet the requirements in accordance with certain rules. The wire rope is composed of steel wire, rope core and grease. A wire rope is a rope that is first twisted into strands by multiple layers of steel wire, and then twisted into a spiral shape by a certain number of strands with the rope core as the center. In material handling machinery, it is used for lifting, towing, tensioning and carrying. The wire rope has high strength, light weight, stable work, not easy to break suddenly, and reliable work.

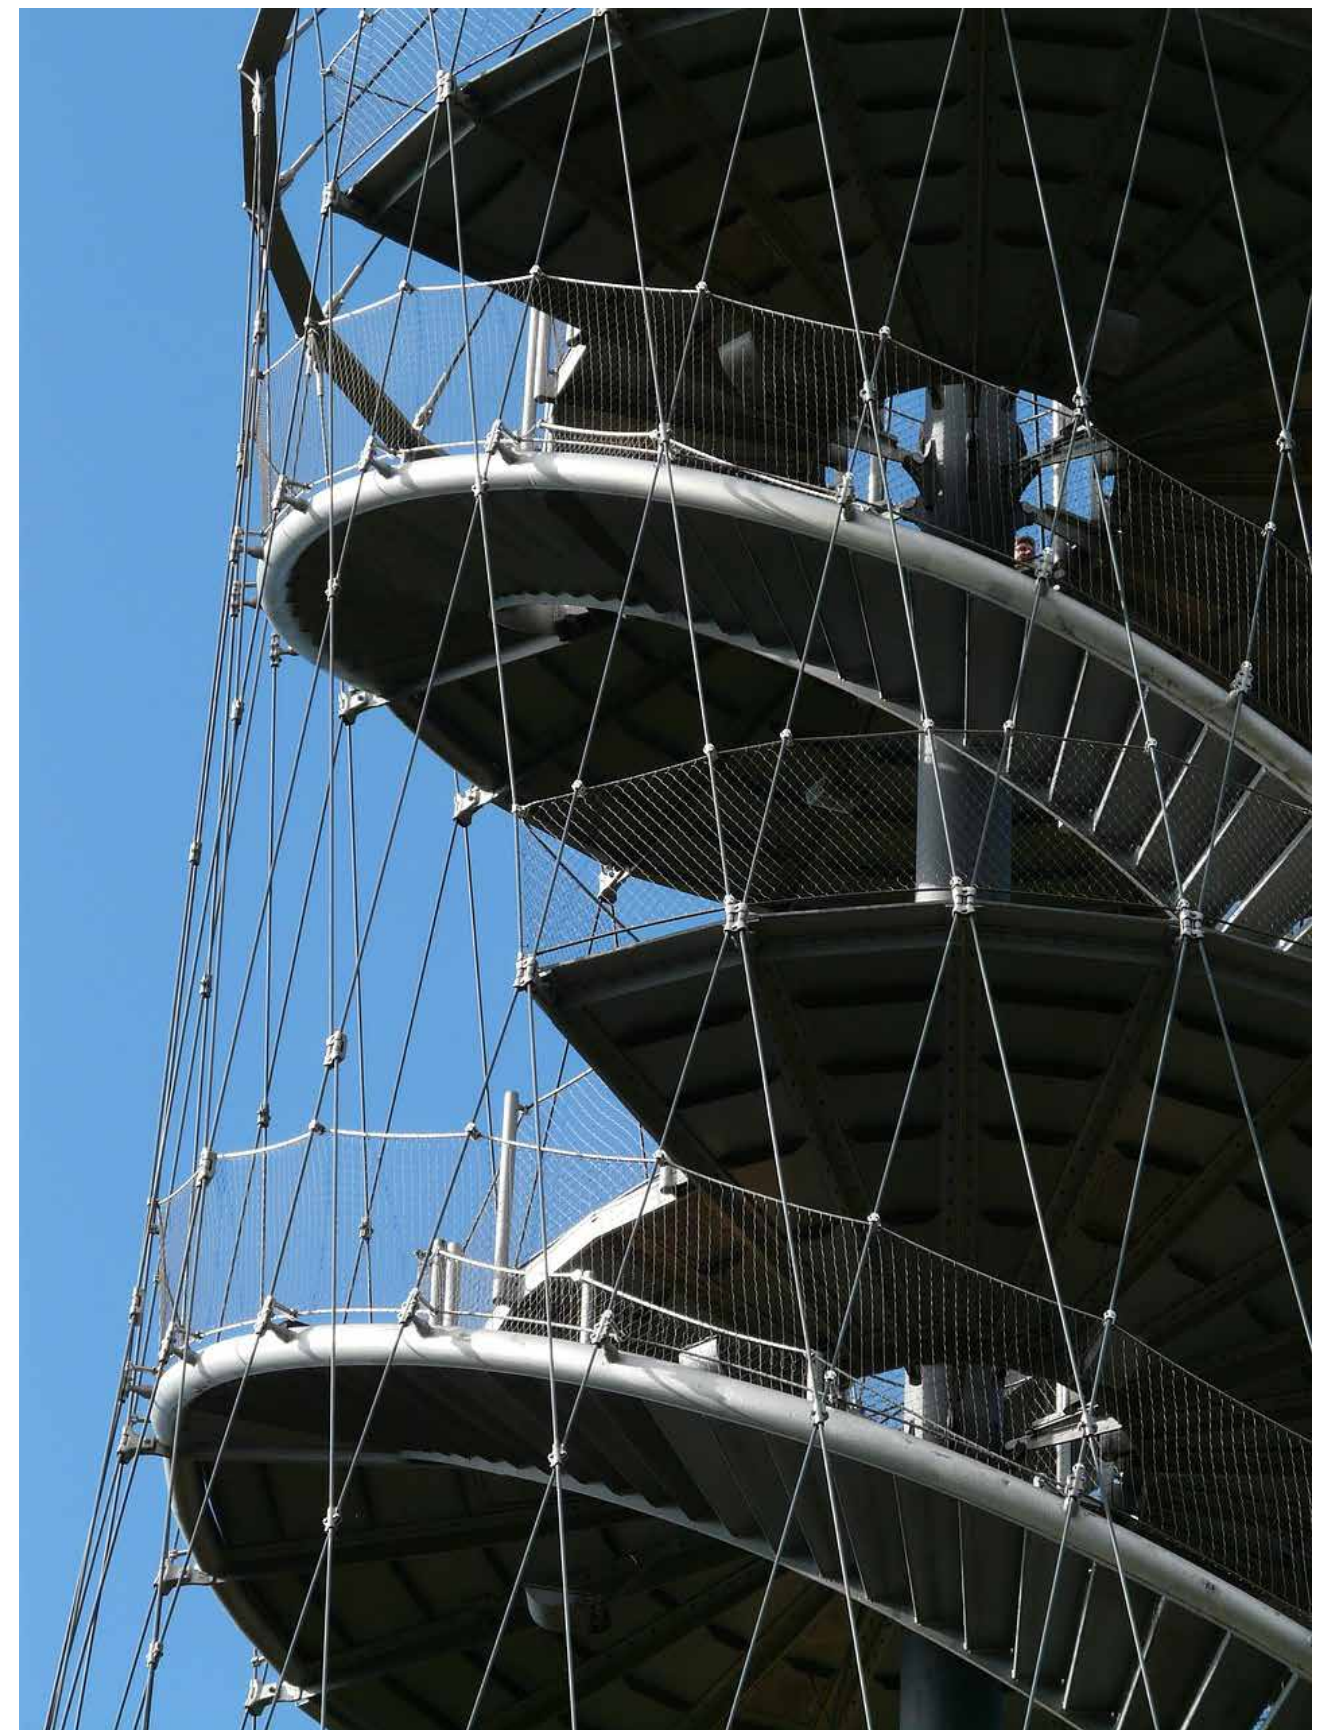



注1: 最小钢丝破断拉力总和=钢丝绳最小破断拉力 $\times 1.111$ 。



注1: 最小钢丝破断拉力总和=钢丝绳最小破断拉力 $\times 1.111$ 。



注1: 最小钢丝破断拉力总和=钢丝绳最小破断拉力 $\times 1.176$ 。



注：最小钢丝破断拉力总和=钢丝绳最小破断拉力 $\times 1.191$ 。

适用于船舶装卸、起重等 for Ship loading and unloading, lifting

注：最小钢丝破断拉力总和=钢丝绳最小破断拉力 $\times 1.191$ 。

适用于船舶装卸、起重等 for Ship loading and unloading, lifting

注1: 最小钢丝破断拉力总和=钢丝绳最小破断拉力 $\times 1.134$ (纤维芯) 或 1.214 (钢芯)。



注1: 最小钢丝破断拉力总和=钢丝绳最小破断拉力×1.134 (纤维芯) 或1.214 (钢芯)。



注1: 最小钢丝破断拉力总和=钢丝绳最小破断拉力×1.134 (纤维芯) 或1.214 (钢芯)。



注1: 最小钢丝破断拉力总和=钢丝绳最小破断拉力×1.134 (纤维芯) 或1.214 (钢芯)。



注:最小钢丝破断拉力总和=钢丝绳最小破断拉力 $\times 1.136$ 。



适用于起重吊装、热移钢机, 起重机械、渔业拖网 for lifting machine, fish net dragging, heat steel-moving machine

适用于起重吊装、热移钢机, 起重机械、渔业拖网 for lifting machine, fish net dragging, heat steel-moving machine



适用于起重吊装、热移钢机, 起重机械、渔业拖网 for lifting machine, fish net dragging, heat steel-moving machine

适用于立井提升、高炉卷扬石油钻井、皮带运输及索道牵引、缆车、挖掘机 for vertical well hoisting, blast furnace winching oil well drilling, belt conveyer and cable way drawing, cable car excavator

适用于立井提升、高炉卷扬石油钻井、皮带运输及索道牵引、缆车、挖掘机 for vertical well hoisting, blast furnace winching oil well drilling, belt conveyer and cable way drawing, cable car excavator



注:最小钢丝破断拉力总和=钢丝绳最小破断拉力 $\times 1.226$ (纤维芯)或 1.321 (钢芯),其中6x37S纤维芯为 1.191 ,钢芯为 1.283
适用于港口装卸和建筑用塔式起重机、吊车等 for port loading and unloading and construction purposes, for tower crane purposes

注:最小钢丝破断拉力总和=钢丝绳最小破断拉力×1.226(纤维芯)或1.321(钢芯),其中6×37S纤维芯为1.191,钢芯为1.28。
适用于港口装卸和建筑用塔式起重机、吊车等 for port loading and unloading and construction purposes, for tower crane purposes

注:最小钢丝破断拉力总和=钢丝绳最小破断拉力 $\times 1.226$ (纤维芯)或 1.321 (钢芯),其中6 $\times$ 37S纤维芯为 1.191 ,钢芯为 1.28 ;
适用于港口装卸和建筑用塔式起重机、吊车等 for port loading and unloading and construction purposes, for tower crane purposes



注: 最小钢丝破断拉力总和=钢丝绳最小破断拉力×1.226 (纤维芯) 或 1.321 (钢芯), 其中 6×37S 纤维芯为 1.191, 钢芯为 1.282;
适用于港口装卸和建筑用塔式起重机、吊车, 等 for port loading and unloading and construction purposes, for tower crane purposes

注:最小钢丝破断拉力总和=钢丝绳最小破断拉力 $\times 1.226$ (纤维芯)或 1.191 ,钢芯为 1.283 。
适用于港口装卸和建筑用塔式起重机、吊车等 for port loading and unloading and construction purposes, for tower crane purposes

注:最小钢丝破断拉力总和=钢丝绳最小破断拉力 $\times 1.226$ (纤维芯)或 1.321 (钢芯),其中6 $\times 37$ S纤维芯为 1.191 ,钢芯为 1.28 。
适用于港口装卸和建筑用塔式起重机、吊车等 for port loading and unloading and construction purposes, for tower crane purposes



注: 最小钢丝破断拉力总和=钢丝绳最小破断拉力×1.226 (纤维芯) 或 1.321 (钢芯), 其中6x37S纤维芯为1.191, 钢芯为1.283。
适用于港口装卸和建筑用塔式起重机、吊车等 for port loading and unloading and construction purposes, for tower crane purposes



注:最小钢丝破断拉力总和=钢丝绳最小破断拉力 $\times 1.226$ (纤维芯)或 1.191 ,钢芯为 1.283 。

适用于港口装卸和建筑用塔式起重机、吊车等 for port loading and unloading and construction purposes, for tower crane purposes

注：最小钢丝破断拉力总和=钢丝绳最小破断拉力×1.249（纤维芯）或1.336（钢芯）。

适用于立井平衡绳、起重机械、船舶装卸、打捞沉船、渔业拖网、起重吊装 for vertical well balance, loading and unloading of ship, fish net



注：最小钢丝破断拉力总和=钢丝绳最小破断拉力×1.249（纤维芯）或1.336（钢芯）。

适用于立井平衡绳、起重机械、船舶装卸、打捞沉船、渔业拖网、起重吊装
for vertical well balance, loading and unloading of ship, fish net dragging and salvaging sunken ship

 1×7

1×19

适用于各种起重机, 提升、牵引等设备 for various equipment of lifting, hoisting and dragging, the rope with steel core may be used under the shock load

7x7

7×19

直径 Diameter	参考重量 Weight		最小破断拉力 Lbs Nominal B.S	
inch	lb/100m	kg/100m	AISI304	AISI316
5/64"	1.14	1.7	650	560
3/32"	1.74	2.59	920	810
1/8"	2.9	4.32	1760	1530
5/32"	4.5	6.7	2400	2110
3/16"	6.5	9.67	3700	3210
7/32"	8.6	12.8	5000	4350
1/4"	11	16.37	6400	5600
9/32"	13.9	20.68	7800	6800
5/16"	17.3	25.74	9000	8200
3/8"	24.3	36.16	12000	11000
7/16"	35	52.08	16500	15000
1/2"	46	68.45	22800	20700
9/16"	59	87.8	28500	26000
5/8"	72	107.14	35000	31900
3/4"	104	15476	49600	45100
7/8"	142	211.31	66500	60500
1"	185	275.3	85400	77600
1 1/8"	234	348.22	106400	96400
1 1/4"	289	430.06	129400	118000